

SB67070 SIP gateway

The AT&T Synapse® SB67070 SIP gateway supports up to 16 simultaneous SIP sessions (calls) and can register with up to four different service providers at the same time. It integrates seamlessly into existing Synapse systems using the SB67010 analog PSTN gateway and the SB67060 T1/PRI gateway. Or, it can be used on its own and/or in conjunction with Synapse SIP gateways at remote locations for interbranch calling. It supports external calling for up to 100 extensions and offers full control over inbound call routing (with or without DID numbers), including configurable dial string rules for automatic route selection (ARS) and least cost routing (LCR).



System features

Capacity: 100 extensions, 16 PSTN lines, 16 SIP trunks and PRI	Caller ID*, do not disturb (DND)
Supports multi-line appearances (MLA) or multi-call appearances (MCA)	System-wide and zone paging
Supports DHCP servers for automatic IP address assignment	Voicemail-to-email forwarding
Call forwarding, transfer, 3-party conference, redial log	100 number system phonebook
30 minutes of voicemail storage per extension**	Automatic clock setting using NTP
Automated attendant (up to 4; 20 menus)	English/French setup menus (CAN)
Custom recording of on-hold messages	Upgradable software, backup and restore

System features available in call appearance mode only

Call screening, call queuing, call park/retrieve	Trunk reservation and trunk routing
Auto answer (intercom auto answer available in line appearance mode only)	Ring groups, hunt group, audible ring delay
Busy lamp field/direct station select (BLF/DSS)	Group mailbox
Toll restriction	Configurable dial plan


SB67070 SIP gateway features

RFC 3261-compliant	ITSP certified (see website for current list)
Up to 16 SIP trunks	Rack-mountable
Supports site-to-site calling with other Synapse systems	Supports up to 10 accounts - ITSPs and/or remote sites

*Use of caller ID features require a subscription available through your local telephone company.

**Actual recording time depends on individual message characteristics.



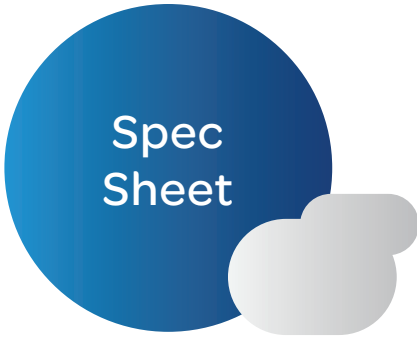

SB67070 SIP gateway

Specifications, weights & dimensions

Color: black	Giftbox weight: 6 lbs.
SKU: 02283	Master pack: 19" x 15.5" X 11.5" (WxDxH)
Product dimensions: 13.5" x 7.9" x 1.8" (WxDxH)	Master pack cubic dimension: 3,386 cu. In.
Product weight: 3.75 Lbs.	Master pack weight: 26.5 Lbs.
Giftbox dimensions: 18" x 10" x 3.5" (WxDxH)	Quantity: 4
Giftbox cubic dimension: 630 cu. In.	

U.S. codes

APN 80-7972-00

UPC



Master pack



Canada codes

VPN 80-7972-01-05

UPC



Master pack

